

Application environment

- RDEP can be applied in the strong magnetic field environment such as automotive manufacturing or areas near welding machine.
- When RDEP detects the magnetic AC field (50 or 60Hz) it will keep the status of output and will not be effected.

Order example

RDEP — □


MODEL

WIRE LENGTH


3M: 3000mm

QD: M12, 4 Pin connector

Dimension

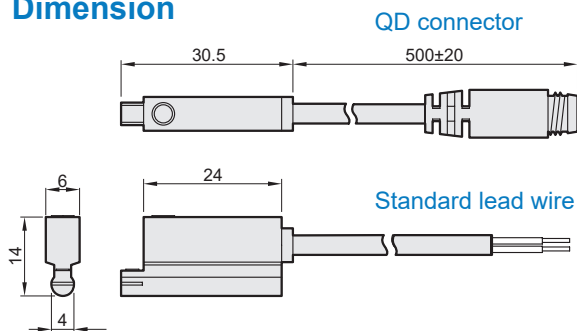

Specification

Model	RDEP
Wiring method	2 wire
Switching logic	Solid state output, normally open
Switch type	Current sourcing
Operating voltage	10~28V DC
Switching current	5~50mA max.
Switching rating (*1)	1.5W max.
Current consumption (*5)	—
Voltage drop (*5)	5V max.
Leakage current (*5)	1mA max.
Indicator (Sensing range)	Red LED: Unstable; Green LED: Stable
Cable	ø4.8, 2C, PVC
Temperature range	-10°C~+60°C (No freezing)
Shock (*2)	50G
Vibration (*3)	9G
Enclosure classification	IEC 60529 IP67
Protection circuit (*4)	3, 4
Weight	100 g (3m cable)
Connect diagram	

*1. Warning: Never exceed rating (watt=voltage×amperage). Permanent damage to sensor will occur.

*2. Sin wave / X.Y.Z. 3 directions / 3 times each direction / 11ms each time.

*3. Double amplitude 1.5mm / 10Hz~55Hz~10Hz(Sweep 1min) / X.Y.Z. 3 directions / 1 hour each time.


*4. 1=None / 2=Short-circuit / 3=Power source reverse polarity / 4=Surge suppression.

*5. It bases on conditions of voltage 24V DC, ambient temp. 25°C and cable 2M length. Voltage drop increases in pace with cable length.

*6. Caution for safety please refer to page 9-3~4.


Wiring of the QD

- 2 wire



Weld-field immune

The operational distance can be 0mm between sensor and welding gun (welding conductor or cable) when the welding current less than 16000A.

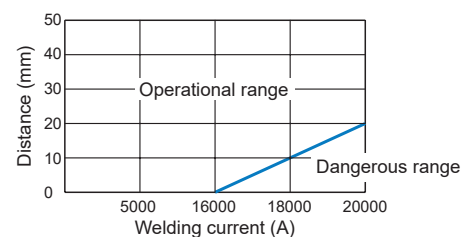

Assembling style

Cylinder type	Mounting clamp
MCJA, MCJQ, MCKJQ, MCFA, MCGB, MCGS, MCGD, MCGJ, MCG3, MCDA, MCSS, MCSH, MCSQ, MCRA, MCKB, MCKC, MSB*, MSL*	