



Specification

Model	M83R / M83RL	M84R / M84RL	M88R		
Female pin out					
Number of contacts	3	4	8		
Rated voltage	60V DC/AC		30V DC		
Rated current	3A		1.5		
Contact material	Gold plated brass				
Contact bearer material	PA				
Housing material	PP		PA		
Housing color	Black				
Cable material	ø4.5 PVC	ø4.5 PUR	ø4.5 PVC	ø4.5 PUR	ø5 PVC
Cable color	Gray	Black	Gray	Black	Black
Temperature	-20°C~+80°C (No freezing)				
Cable conductor	24AWG		26AWG		
Protection class	IEC60529 IP 67				

Order example


M83 R — PVC — □

Model	Connector	Cable material	Cable length
M83	M8, 3 Pin	R: Straight cable socket PVC: ø4.5 PVC cable	Blank: 2000 mm
M84	M8, 4 Pin	RL: Angle cable socket PUR: ø4.5 PUR cable	5M: 5000 mm
M88	M8, 8 Pin	R: Straight cable socket PVC: ø5 PVC cable	0.45M: 450 mm

Dimension


- Straight cable socket (R)

M83/M84

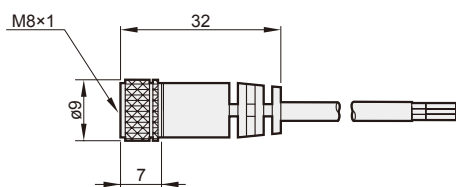

- Angle cable socket (RL)

M83/M84

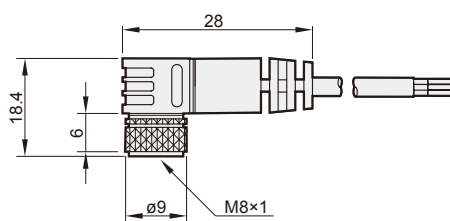

M88

