




Max values for dynamic conditions.

Please refer to the following formula when combined loads are applied.

$$\frac{F_{yA}}{F_y} + \frac{F_{zA}}{F_z} + \frac{M_{xA}}{M_x} + \frac{M_{yA}}{M_y} + \frac{M_{zA}}{M_z} \leq 1$$

* The A letters show the calculated value.

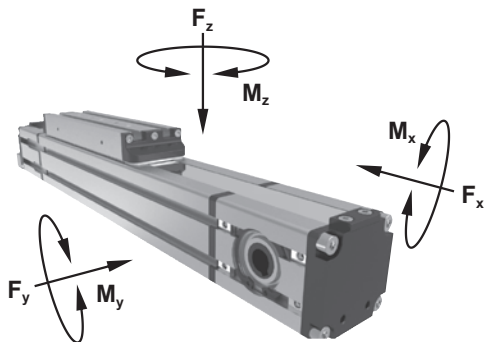

Features

- Belt driven unit with railway integrated.
- Extruded aluminum anodized 6060 alloy, tempered stainless steel protection band.
- Carriage with sealed system to protect against pollution.

Specification

Model		METB		
Size	(mm)	42	55	80
Max. speed	(m/s)	3	3	3
Max. stroke length	(mm)	6000	6000	6000
Min. stroke length	(mm)	100	100	100
Pulley drive ratio	(mm)	90	120	160
Number of teeth of pulley	(mm)	18	24	32
Belt width (Teeth type ATL5)	(mm)	12	16	25
Max rpm	(g/min)	2000	1500	1150
Max. load	F _x (N)	460	820	1650
	F _y (N)	1560	1850	4500
	F _z (N)	1560	1850	4500
Moments	M _x (Nm)	20	25	80
	M _y (Nm)	55	120	450
	M _z (Nm)	55	120	450
Inertia moment aluminum profile	I _x (cm ⁴)	11.8	36	183
	I _y (cm ⁴)	14.2	45	226
Positioning repeatability	(mm)	±0.05	±0.05	±0.05
Max. radial load on input shaft	(N)	220	300	300
No load torque	(Nm)	>0.1	>0.5	0.9
Sensor switch (*)		RCI		
Basic weight	(kg)	1.6	4.8	6
Added weight per 100 mm stroke	(kg)	0.25	0.37	0.9


* RCI specification, please refer to page 5-7.

Order example


METB - 42 - 0100 - F08 L

Model	Size (mm)	Stroke	Shaft versions	Male shaft																																						
METB Female shaft	42 42×42 55 55×55 80 80×80	100~6000 mm (4 codes) * Minimum stroke unit 1mm.	<table border="1"> <thead> <tr> <th>Size</th> <th>Type</th> <th>ø</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="3">42</td> <td>Female shaft</td> <td>8</td> <td>F08</td> </tr> <tr> <td>Male shaft</td> <td>12</td> <td>M12</td> </tr> <tr> <td>Double male shaft</td> <td>12</td> <td>D12</td> </tr> <tr> <td rowspan="3">55</td> <td>Female shaft</td> <td>8</td> <td>F08</td> </tr> <tr> <td>Male shaft</td> <td>16</td> <td>M16</td> </tr> <tr> <td>Double male shaft</td> <td>16</td> <td>D16</td> </tr> <tr> <td rowspan="3">80</td> <td>Female shaft</td> <td>19</td> <td>F19</td> </tr> <tr> <td>Male shaft</td> <td>19</td> <td>M19</td> </tr> <tr> <td>Double male shaft</td> <td>19</td> <td>D19</td> </tr> </tbody> </table>	Size	Type	ø	Part No.	42	Female shaft	8	F08	Male shaft	12	M12	Double male shaft	12	D12	55	Female shaft	8	F08	Male shaft	16	M16	Double male shaft	16	D16	80	Female shaft	19	F19	Male shaft	19	M19	Double male shaft	19	D19	<table border="1"> <thead> <tr> <th>L</th> <th>R</th> </tr> </thead> <tbody> <tr> <td>Left shaft</td> <td>Right shaft</td> </tr> </tbody> </table>	L	R	Left shaft	Right shaft
Size	Type	ø	Part No.																																							
42	Female shaft	8	F08																																							
	Male shaft	12	M12																																							
	Double male shaft	12	D12																																							
55	Female shaft	8	F08																																							
	Male shaft	16	M16																																							
	Double male shaft	16	D16																																							
80	Female shaft	19	F19																																							
	Male shaft	19	M19																																							
	Double male shaft	19	D19																																							
L	R																																									
Left shaft	Right shaft																																									
Male shaft																																										
Double male shaft																																										


End supported top load

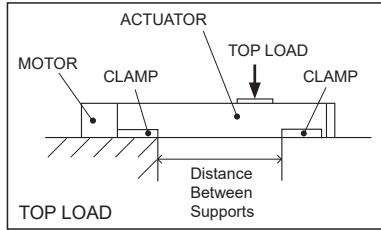


- METB-42
- METB-55
- METB-80

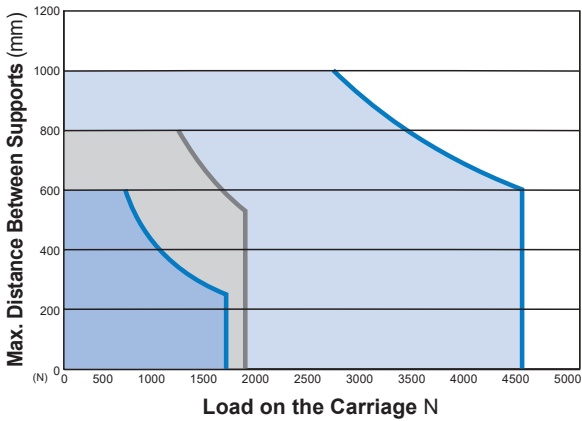


End supported side load

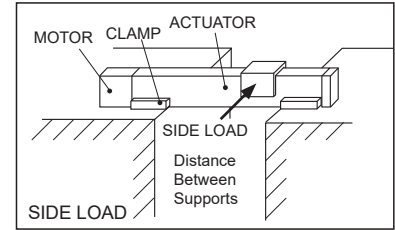


- METB-42
- METB-55
- METB-80

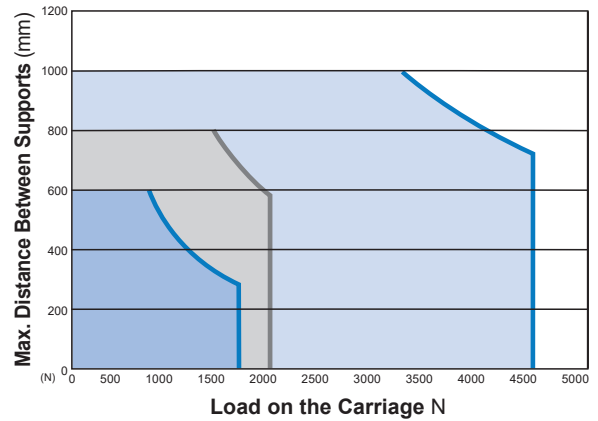


Cantilevered top load

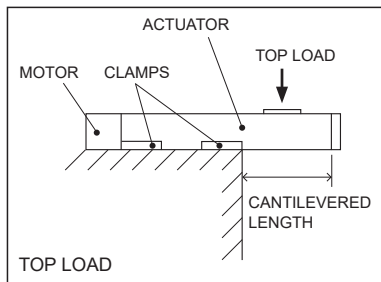


- METB-42
- METB-55
- METB-80

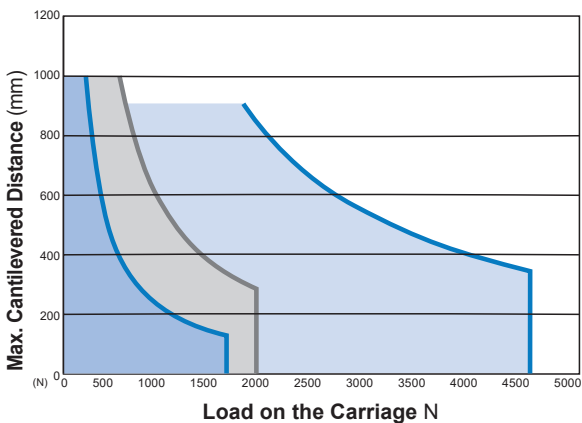


Cantilevered side load

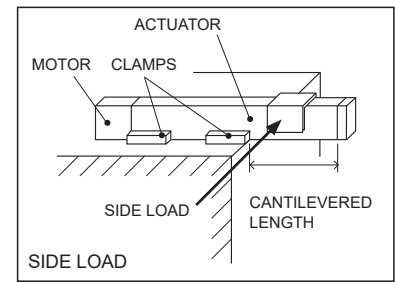


- METB-42
- METB-55
- METB-80

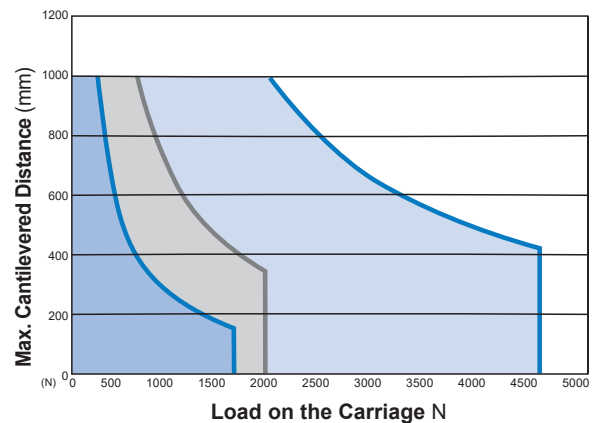




□42, □55

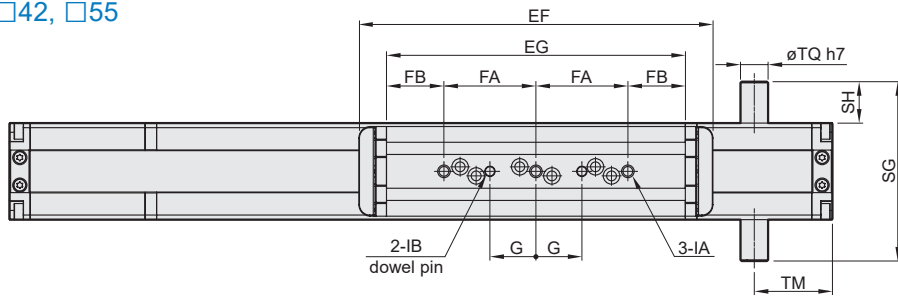

□80

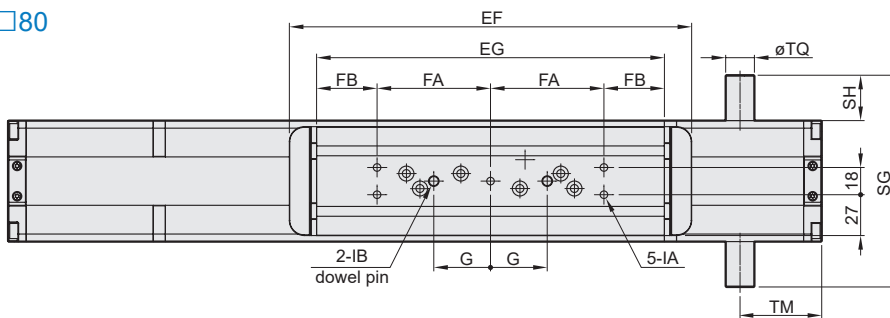


Groove position

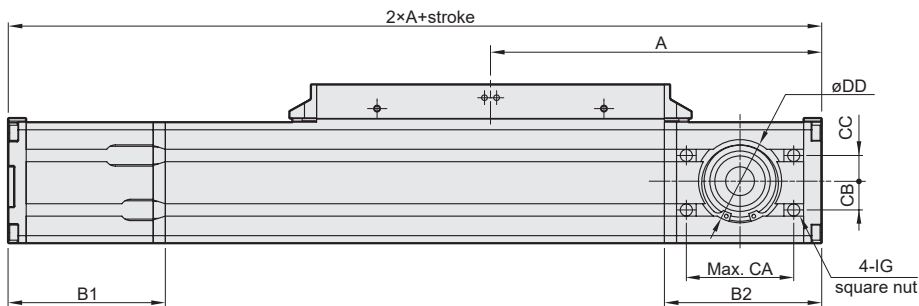


Shaft versions


Female shaft




Double male shaft

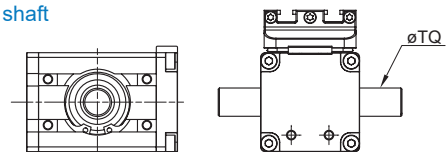

Single male shaft:
side right

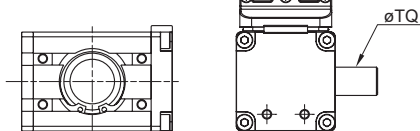

Single male shaft:
side left

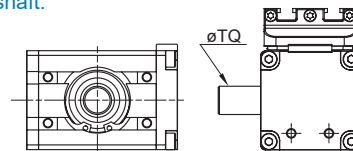


Code Tube I.D.	A	B1	B2	CA	CB	CC	DD	EF	EG	FA	FB	G	IA	IB	IG	IT
42	129.5	64	64	42	10	9.5	ø30×H7×1.7 dp	154	130	40	25	20	M5×0.8×5 dp	ø4×H7×5 dp	M5×0.8 DIN 562	M4×6 dp
55	166	88	88.5	55	8.5	13.5	ø32×H7×1.5 dp	190	150	55	20	30	M5×0.8×7.5 dp	ø5×H7×5 dp	M5×0.8 DIN 562	M5×6 dp
80	219	104	104	71	19.5	16.5	ø55×H7×2.75 dp	266	230	75	40	37.5	M6×1.0×10 dp	ø6×H7×10 dp	M8×1.25 DIN 562	M6×4 dp

Code Tube I.D.	J1	J2	K	M	N	P	Q	QB	RA	RZ	SG	SH	TM	TQ	TR	UF	UJ	V1	V2	W1	W2	X1	X2	Z1	Z2
42	4×4×14	4	21	39	20	16	13	7	42	59.5	78	18	34	12	8	19.5	11	3.2	4.9	5.3	8	3.2	4.9	5.3	8.6
55	5×5×20	3.5	25	50	28	23	16	8	55	76.5	93	19	49	16	8	22	16.5	4.2	6.2	5.2	8.4	4.3	6.3	5.3	8.6
80	6×6×25	5.5	41.5	72	40	40	20	8	80	105.25	140	30	54	19	19	36	22	6	8.5	6.5	11	7	11	8.2	13.2

End cap mounting


(2 pcs/set)

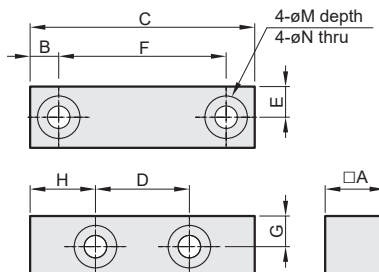

Code Size	A	B	C	D	E	F	G	H	M	N	Weight (g)	Order number
METB-42	14	5	42	16	7	32	7	13	8×4.4 depth	4.5	65	LB-EB1-42
METB-55	15	7	55	23	7.5	41	7	16	10×5 depth	5.5	100	LB-EB1-55
METB-80	16	8	80	40	8	64	8	20	11×6 depth	6.6	160	LB-EB1-80


Mid section mounting

(2 pcs/set)

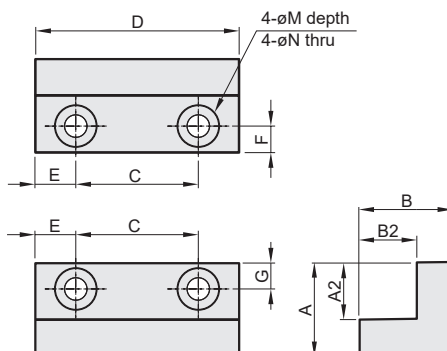

Code Size	A	A2	B	B2	C	D	E	F	G	M	N	Weight (g)	Order number
METB-42	17	12	17	12	25	40	7.5	6	6	10×3.5 depth	5.5	45	MS-EB1-42
METB-55	23	14	23	14	30	50	10	6.5	6.5	10×5.5 depth	5.5	130	MS-EB1-55
METB-80	32	19	34	21	40	60	10	8	10	15×8.6 depth	9	310	MS-EB1-80

Installation of sensor switch

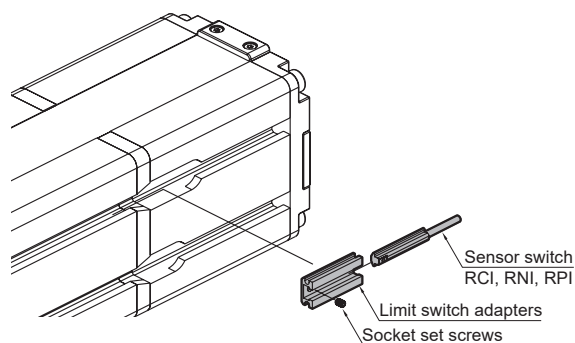

Limit switch adapters

AK-EB1 (Only for size 80)

Weight: 15 g

